

HOW TO OPERATE

1. Once the bowl has been cleaned and sanitized, fill the mix tank with the desired liquid product (3 gallons maximum). Do not overfill the tank. **NOTE THAT WHEN READY, SLUSH OCCUPIES MORE VOLUME THAN THE LIQUID** (approximately 3.5 gallons of slush for 3 gallons of liquid).
2. If using natural products as a base (coffee, lemon juice, orange juice, etc.), it is required that 5 to 7 oz. of sugar per gallon be added. If using a concentrate, follow the mixing instructions from the supplier. In general the brix ratio (sugar content) of the product solution (liquid mix) should not be less than 11.
3. To access to switches and timer, open the switch panel cover by pushing on the side (arrow A) and pulling (arrow A') (Fig. 10).

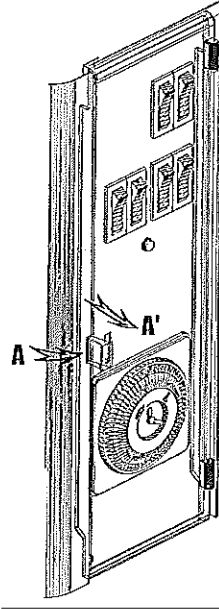


Figure 10

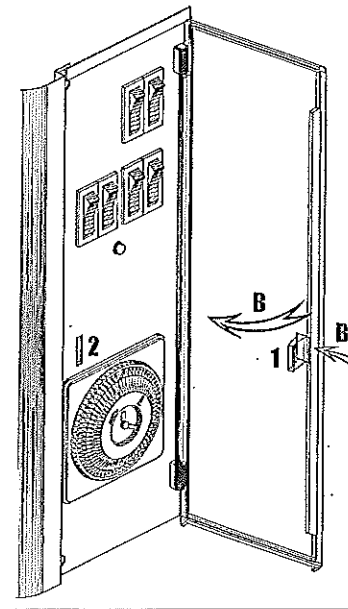


Figure 11

To close the cover (arrow B'), push on the front (arrow B) until the clear plastic part (1) snaps closed (Fig. 11).

4. To operate, press main power switch and agitator switch to ON position (Figure 12). **NOTE: The agitator switch must be to ON position before setting to liquid or slush mode.**
 - 4.1 For slush, press the cooler switch to bottom position (II / *).
 - 4.2 For liquid, press the cooler switch to up position (I / ⚡). If the machine is being used as a liquid cooler, it is provided with an inside thermostat for controlling the liquid temperature.

Note that your machine is equipped with a time delay relay that provides for a four minute delay from the time of the initial start. This is to prevent the compressor from short cycling. Once the compressor is ON, the green light will be on.

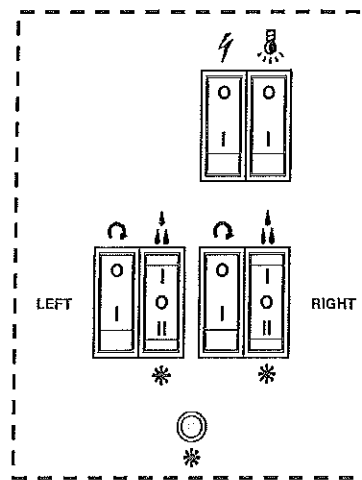


Figure 12

Note: The cooler switch is a three position switch and in order to have the compressor off, all the cooler switches need to be in the middle position.

5. To illuminate the mix tank cover display on top of the unit and the product in the bowl press the display light switch to down position (I / ⚡).

CAUTION: IF THE MACHINE IS STOPPED AT NIGHT WITH ICE IN THE TANK, REMOVE ALL ICE SLABS BEFORE STARTING.